


ZS Series Solenoid Valve (Normal Close)



Ordering Code ZS Series 2/2 Solenoid Valve (Normal Close)


ZS	06		-	10L			AC220V
Type Code	Joint Size	Seals	Orifice	Valve Body	Control Style	Standard Voltage	
	06:1/8"	Blank:NBR	2.5L:2.5	Blank: Brass	Blank:Normal Close	AC110V	
	08:1/4"	V:VITON	3L:3.0	S1:SS316	H: Normal Open	AC220V	
	10:3/8"	E:EPDM	4L:4.0	S2:SS304		DC12V	
	15:1/2"	G:Silicon rubber	5L:5.0			DC24V	
	20:3/4"		6L:6.0				
	25:1"		7.5L:7.5				
	35:1-1/4"		10L:10.0				
	40:1-1/2"		16L:16.0				
	50:2"		20L:20.0				
	F:With Flange		25L:25.0				
			35L:35.0				
			40L:40.0				
			50L:50.0				

Cancel if same with port size


- * Normal close/Normal open, available body: Brass, SS304 SS316;
- * Multiple seals are available for different medium;
- * Wide size range from 1/8" to 2", with both thread and flange connection;
- * Diaphragm pilot solenoid valve, with lower working pressure (10mm is special).

Specifications


Φ2.5mm 1/8" 1/4"

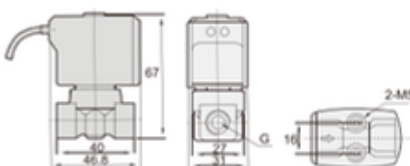

Φ10mm 1/4" 3/8" 1/2"

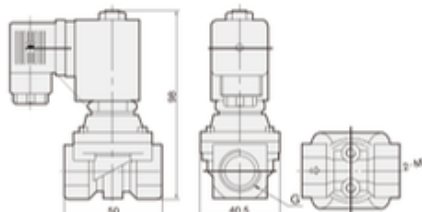

Big orifice

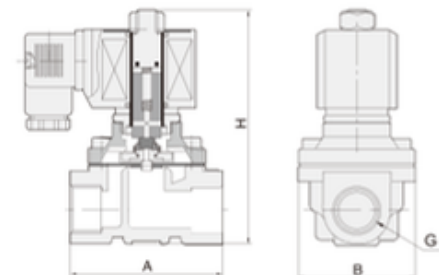

Φ4mm 3/8"

