
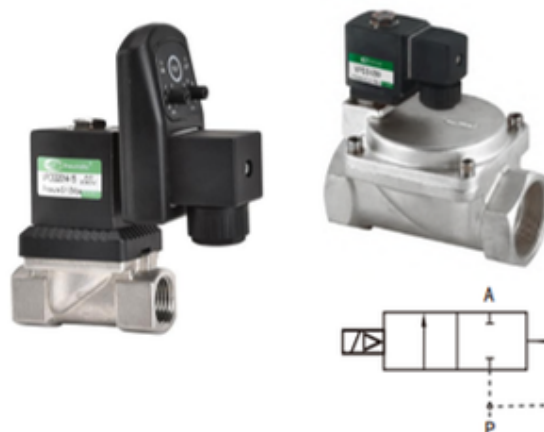


VPC Series Stainless Steel Pilot-Diaphragm Solenoid Valve


Ordering Code VPCS Series Stainless Steel Pilot-Diaphragm Solenoid Valve

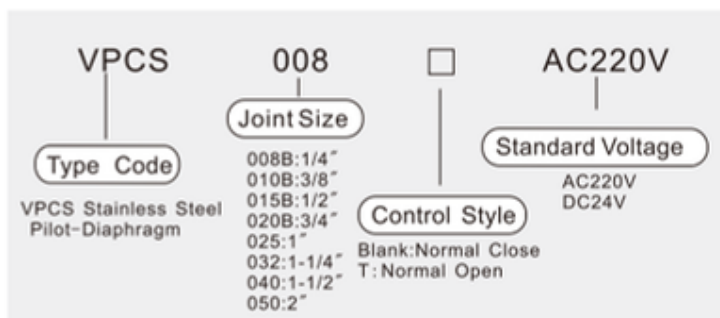

Specifications

Model	Orifice	Joint Size	Working Pressure	KV Value	Ambient Temp	Working Temp
VPCS008B	10mm	G1/4"	0.2-1.0Mpa	1.4m³/h	-10~50°C	-10~80°C
VPCS010B	10mm	G3/8"	0.2-1.0Mpa	1.4m³/h		
VPCS015B	10mm	G1/2"	0.2-1.0Mpa	1.4m³/h		
VPCS020-20B	22mm	G3/4"	0-1.0Mpa	6.4m³/h		
VPCS025	22mm	G1"	0-1.0Mpa	6.4m³/h		
VPCS032	40mm	G1-1/4"	0.2-1.6Mpa	18m³/h		
VPCS040	40mm	G1-1/2"	0.2-1.6Mpa	18m³/h		
VPCS050	50mm	G2"	0.2-1.6Mpa	28m³/h		

Main Dimension

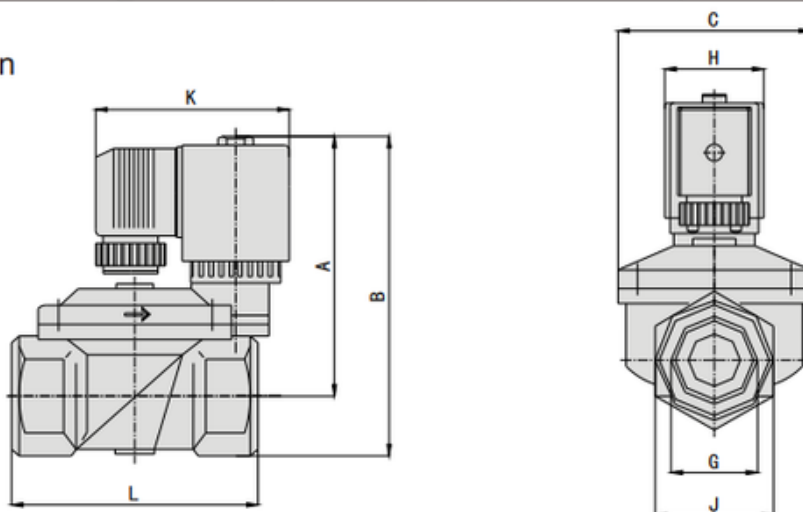

Model	G	L	K	A		B		C	H	J
				N.C	N.O	N.C	N.O			
VPCS008B	G1/4	52	76	72	-	85	-	38	36	26
VPCS010B	G3/8	52	76	72	-	85	-	38	36	26
VPCS015B	G1/2	52	76	72	-	85	-	38	36	26
VPCS020-20B	G3/4	84	88	112	-	132	-	60	45	40
VPCS025	G1	84	88	112	-	132	-	60	45	40
VPCS032	G1-1/4	136	76	104	119	132	147	95	36	55
VPCS040	G1-1/2	136	76	104	119	132	147	95	36	55
VPCS050	G2	161	76	110	125	145	160	112	36	70